
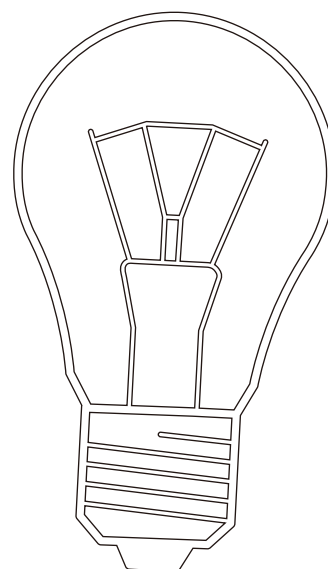
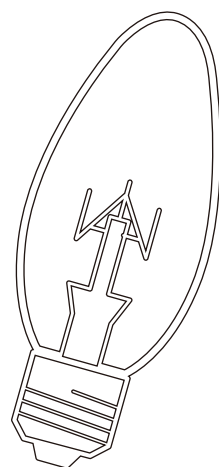
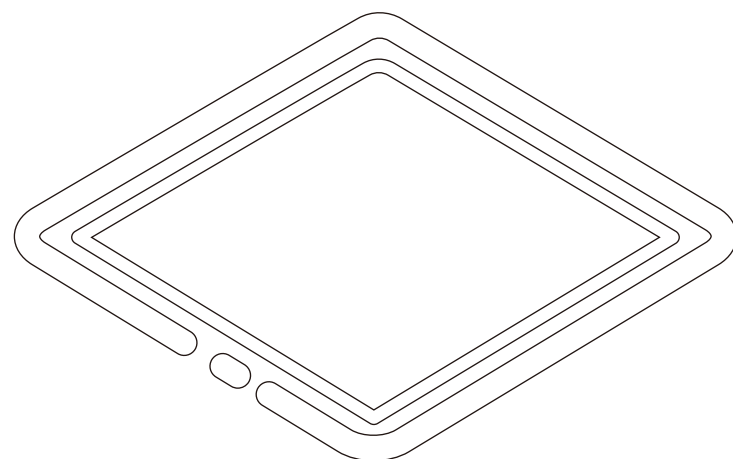


ARTIC TEC

- Classical LED Bulb
- LED Filament Bulb
- LED Decorative Bulb
- LED Smart Bulb
- LED Down Light
- LED Flood/Panel Light
- LED Sensor Bulbs/SMD Down Light

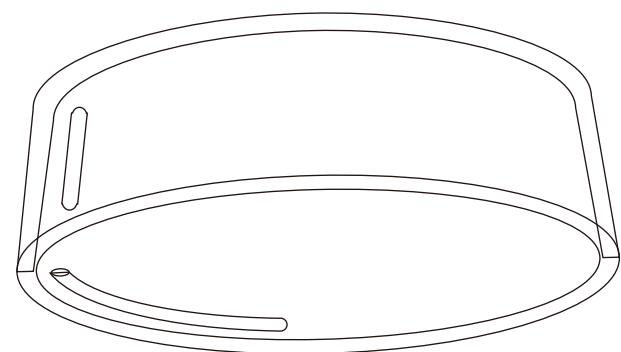

**Classical LED Globe Bulb**

Classical LED Global Bulb

**Classical LED Bulb****A-Series Bulb**

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	
A55	5W	110V/230V	500	>80/90	270°	Φ55*102	E26/E27/B22
	7W	110V/230V	700	>80/90	270°	Φ55*102	E26/E27/B22
A60	10W	110V/230V	1000	>80/90	270°	Φ60*108	E26/E27/B22
	12W	110V/230V	1200	>80/90	270°	Φ60*118	E26/E27/B22
	15W	110V/230V	1500	>80/90	270°	Φ60*120	E26/E27/B22
A70	18W	110V/230V	1800	>80/90	270°	Φ70*128	E26/E27/B22
A80	20W	110V/230V	2000	>80/90	270°	Φ80*145	E26/E27/B22

**C35/C35T**

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Base
C37	3W	110V/230V	240	> 80/90	180°	Φ 37*100	E14/E26/E27/B22
	6W	110V/230V	600	> 80/90	180°	Φ 37*100	E14/E26/E27/B22
	7W	110V/230V	700	> 80/90	180°	Φ 37*108	E14/E26/E27/B22
C37T	3W	110V/230V	240	> 80/90	180°	Φ 37*125	E14/E26/E27/B22
	6W	110V/230V	600	> 80/90	180°	Φ 37*125	E14/E26/E27/B22
	7W	110V/230V	700	> 80/90	180°	Φ 37*133	E14/E26/E27/B22



Classical LED Bulb

G45/P45 Bulb Series



Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Base
G45	3W	110V/230V	240	> 80/90	180°	Φ45*81	E14/E26/E27/B22
	6W	110V/230V	600	> 80/90	180°	Φ45*81	E14/E26/E27/B22
	7W	110V/230V	700	> 80/90	180°	Φ45*81	E14/E26/E27/B22



GU10 Bulb Series

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Base
GU10	3W	110V/230V	240	> 80/90	38°/60°/120°	Φ50*56	GU10
	6 W	110V/230V	6 00	> 80/90	38°/60°/120°	Φ50*56	GU10
	7W	110V/230V	700	> 80/90	38°/60°/120°	Φ50*56	GU10



GU5.3/MR 16 Bulb Series

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Base
	3W	AC/DC 12V 110V/230V	240	> 80/90	38°/60°/120°	Φ50*50	GU5.3
	6 W	AC/DC 12V 110V/230V	6 00	> 80/90	38°/60°/120°	Φ50*50	GU5.3
	7W	AC/DC 12V 110V/230V	700	> 80/90	38°/60°/120°	Φ50*50	GU5.3



Mini T-Bulb Series

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Base
Mini T-bulb	6W	110V/230V	600	> 80/90	180°	Φ37*97	E26/E27/B22
	7W	110V/230V	700	> 80/90	180°	Φ37*115	E26/E27/B22
	9W	110V/230V	900	> 80/90	180°	Φ37*115	E26/E27/B22
	12W	110V/230V	1200	> 80/90	180°	Φ45*136	E26/E27/B22
	15W	110V/230V	1500	> 80/90	180°	Φ45*136	E26/E27/B22



Classical LED Bulb

R39/R50/R63/R80 Bulb Series



Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Base
R39	3W	110V/230V	220	> 80/90	120°	Φ39*68	E14
	4W	110V/230V	400	> 80/90	120°	Φ39*68	E14
R50	5W	110V/230V	500	> 80/90	120°	Φ50*88	E14
	6W	110V/230V	600	> 80/90	120°	Φ50*88	E14
R63	7W	110V/230V	700	> 80/90	120°	Φ50*88	E14
	7W	110V/230V	700	> 80/90	120°	Φ63*104	E27
	9W	110V/230V	900	> 80/90	120°	Φ63*104	E27
R80	10W	110V/230V	1000	> 80/90	120°	Φ80*114	E27
	12W	110V/230V	1200	> 80/90	120°	Φ80*114	E27



Global G80/G95/G120 Series

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Base
G80	12W	110V/230V	1200	> 80/90	180°	Φ80*120	E27/B22
G95	15W	110V/230V	1500	> 80/90	180°	Φ95*136	E27/B22
G120	18W	110V/230V	1800	> 80/90	180°	Φ120*160	E27/B22
	20W	110V/230V	2000	> 80/90	180°	Φ120*160	E27/B22



GX53 Series

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Base
GX53	8W	110V/230V	800	> 80/90	120°	Φ75*25	GX53
	10W	110V/230V	1000	> 80/90	120°	Φ75*28	GX53
	12W	110V/230V	1200	> 80/90	120°	Φ75*28	GX53
	15W	110V/230V	1500	> 80/90	120°	Φ75*28	GX53

Classical LED Bulb



T80/T100/T120/T140 Series

Item No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Base
T80	20W	110V/230V	2000	>80	270°	Φ80*138	E27/B22
T100	30W	110V/230V	3000	>80	270°	Φ100*165	E27/B22
T120	40W	110V/230V	4000	>80	270°	Φ120*194	E27/B22
T140	50W	110V/230V	5000	>80	270°	Φ140*218	E27/B22

Wide range lighting
makes dark areas less

Transparent PC lampshade , 260 degree large curved surface transparent design , provides bright and abundant light for workshops, workshops , living rooms , bedrooms and other holidays



High color rendering,
distributing home decoration color

Repeated light and color tests to truly restore the color of the home decoration, so that the home is always bright in color and pattern.




LED Filament Bulb

LED Filament Bulb

LED FILAMENT LAMP

RETRO DESIGN STYLISH DECORATION


LARGE AREA LED
LED RETRO BULB LIGHT

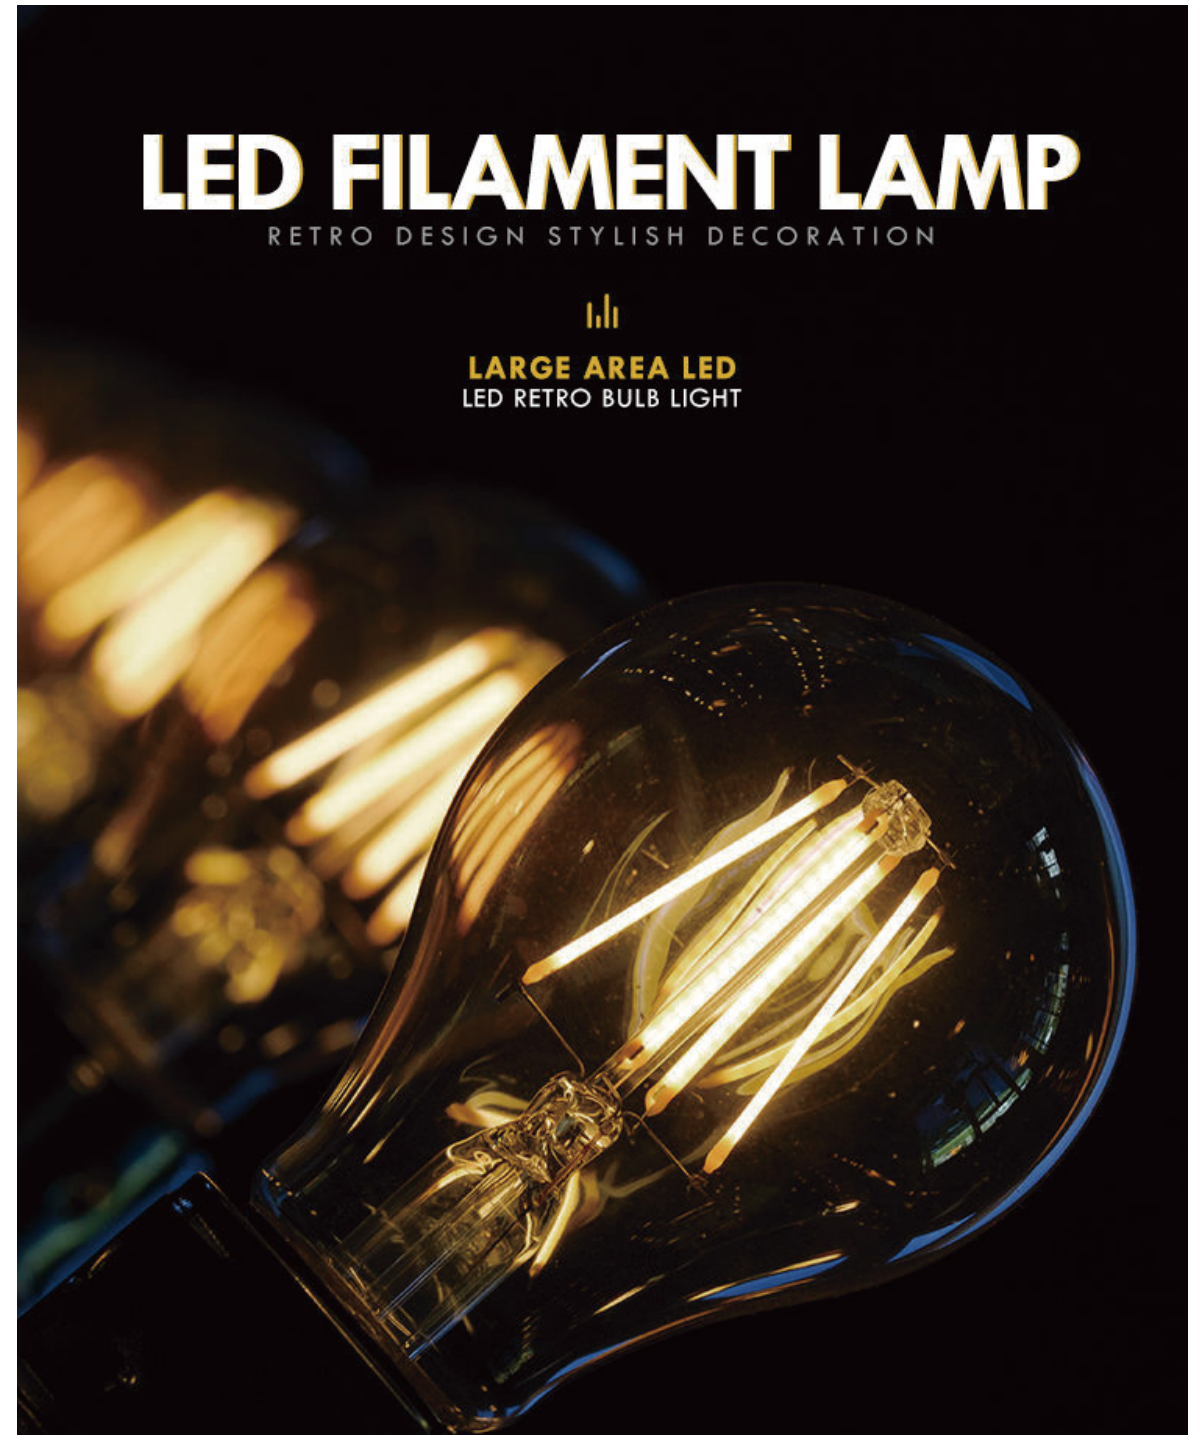

LED Filament Bulb



💡 25W ≈ 250lm

💡 40W ≈ 470lm

💡 60W ≈ 806lm

💡 75W ≈ 1055lm

💡 100W ≈ 1521lm



Milky



Frosted



Amber



Top mirrored



Top gold

Item	Wattage(W)	Voltage(V)	Base	Lumen	Beam Angle	Diameter(mm)	Length(mm)	Material	CCT.
A60	4W	110V/230V	E27/B22	440	360°	60	106	Glass	2700-6500K
	6W	110V/230V	E27/B22	660	360°	60	106	Glass	2700-6500K
	8W	110V/230V	E27/B22	880	360°	60	106	Glass	2700-6500K
	10W	110V/230V	E27/B22	1100	360°	60	106	Glass	2700-6500K
	12W	110V/230V	E27/B22	1320	360°	60	106	Glass	2700-6500K

LED Filament Bulb



C35

C35

- **Housing material:** Glass
- **Available housing:** Clear/Amber/Milky/Frosted
- **Size:** 35*98mm

Non-dimmable version



Dimmable version



Type	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Base
C35	2W	110V/230V	220	80/90	E14/E27/B22
	4W	110V/230V	440	80/90	E14/E27/B22
	6W	110V/230V	660	80/90	E14/E27/B22



C35T

C35T

- **Housing material:** Glass
- **Available housing:** Clear/Amber/Milky/Frosted
- **Size:** 35*120mm

Non-dimmable version



Dimmable version



Type	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Base
C35T	2W	110V/230V	220	80/90	E14/E27/B22
	4W	110V/230V	440	80/90	E14/E27/B22
	6W	110V/230V	660	80/90	E14/E27/B22



G45

G45

- **Housing material:** Glass
- **Available housing:** Clear/Amber/Milky/Frosted/Top Mirred/Top Gold
- **Size:** 45*80mm

Non-dimmable version



Dimmable version



Type	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Base
G45	2W	110V/230V	220	80/90	E14/E27/B22
	4W	110V/230V	440	80/90	E14/E27/B22
	6W	110V/230V	660	80/90	E14/E27/B22



T25

T25

- **Housing material:** Glass
- **Available housing:** Clear/Amber
- **Size:** 25*80mm

Non-dimmable version



Dimmable version



Type	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Base
T25	2W	110V/230V	220	80/90	E14
	4W	110V/230V	440	80/90	E14

LED Filament Bulb



T26

T26

- **Housing material:** Glass
- **Available housing:** Clear/Amber/Milky/Frosted
- **Size:** 26*60mm

Non-dimmable version 
Dimmable version 

Type	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Base
T26	1W	110/230V	100lm	80/90	E14/B15D
	2W	110/230V	200lm	80/90	E14/B15D



T30

T30

- **Housing material:** Glass
- **Available housing:** Clear/Amber
- **Size:** 30*130/30*185/30*225/30*300mm

Non-dimmable version 
Dimmable version 

Type	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Base
T30	4W	110V/230V	440	80/90	E27/B22
	6W	110V/230V	660	80/90	E27/B22
	8W	110V/230V	880	80/90	E27/B22
	10W	110V/230V	1100	80/90	E27/B22



T45

T45

- **Housing material:** Glass
- **Available housing:** Clear/Amber
- **Size:** 45*80mm

Non-dimmable version 
Dimmable version 

Type	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Base
T45	2W	110V/230V	220	80/90	E14/E27/B22
	4W	110V/230V	440	80/90	E14/E27/B22
	6W	110V/230V	660	80/90	E14/E27/B22



Ceiling lamp

Kitchen lamp

Pendant lamp

Chandelier

LED Filament Bulb



G80
G95
G125

G80/G95/G125

- **Housing material:** Glass
- **Available housing:** Clear/Amber/Milky/Top mirred/Top gold
- **Size:** 80*120/95*136/125*175mm

Non-dimmable version 
Dimmable version 

Type	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Base
G80 G95 G125	4W	110V/230V	440	80/90	E27/B22
	6W	110V/230V	660	80/90	E27/B22
	8W	110V/230V	880	80/90	E27/B22
	10W	110V/230V	1100	80/90	E27/B22
	12W	110V/230V	1320	80/90	E27/B22



ST64

ST64

- **Housing material:** Glass
- **Available housing:** Clear/Amber
- **Size:** 64*142mm

Non-dimmable version 
Dimmable version 

Type	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Base
ST64	4W	110V/230V	440	80/90	E27/B22
	6W	110V/230V	660	80/90	E27/B22
	8W	110V/230V	880	80/90	E27/B22
	10W	110V/230V	1100	80/90	E27/B22
	12W	110V/220V	1320	80/90	E27/B22



S14

S14

- **Housing material:** Glass/plastic
- **Available housing:** Clear/Amber
- **Size:** 42*80mm

Non-dimmable version 

Type	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Base
S14	1W	110/230V	100lm	80/90	E27/B22
	2W	110/230V	200lm	80/90	E27/B22





LED Decorative Bulb



G45

G45 - Plastic

- **Housing material:** Plastic
- **Available housing color:** clear/frosted/milky white/red/yellow/green/blue/orange/pink/purple
- **Size:** 45*72mm

Type	Wattage(W)	Voltage(V)	Base
G45	1W	110V/230V	E14/E26/E27/B22
	2W	110V/230V	E14/E26/E27/B22



G45

G45 - Glass

- **Housing material:** Glass
- **Available housing:** red/yellow/blue/green/orange
- **Size:** 45*72mm

Type	Wattage(W)	Voltage(V)	Base
G45	1W	110V/230V	E14/E27/B22
	2W	110V/230V	E14/E27/B22



A60

A60 - plastic

- **Housing material:** Plastic
- **Available housing:** milky white/red/yellow/green/blue/orange/pink/purple
- **Size:** 60*110mm

Type	Wattage(W)	Voltage(V)	Base
A60	3W	110V/230V	E26/E27/B22
	5W	110V/230V	E26/E27/B22
	7W	110V/230V	E26/E27/B22
	9W	110V/230V	E26/E27/B22

A60 - glass

- **Housing material:** Glass
- **Available housing:** red/yellow/blue/green/orange
- **Size:** 60*110mm

Type	Wattage(W)	Voltage(V)	Base
A60	3W	110V/230V	E26/E27/B22
	4W	110V/230V	E26/E27/B22
	5W	110V/230V	E26/E27/B22



A60



LED Smart Bulb



A60



GU10




Item	Wattage(W)	Voltage(V)	Base	Lumen(lm)	Beam Angle	Diameter(mm)	Length(mm)	Material	CCT.
GU10	5W	85-265V	GU10	400	100°	50	56	PC.&Alum.	RGB+W/RGB+CW
A60	7W	85-265V	E26/E27	700	220°	60	110	PC.&Alum.	RGB+W/RGB+CW
	9W	85-265V	E26/E27	810	220°	60	110	PC.&Alum.	RGB+W/RGB+CW
	12W	85-265V	E26/E27	1050	220°	60	110	PC.&Alum.	RGB+W/RGB+CW

A60
-1A60
-2

Microwave induction+light control

Day and night light control

Item	Wattage(W)	Voltage(V)	Base	Lumen(lm)	Beam Angle	Diameter(mm)	Length(mm)	Material	CCT.
A60-1	9W	110V230V	E26/E27	900	220°	60	120	PC.&Alum.	2700-6500K
A60-2	10W	110V/230V	E26/E27	1000	220°	60	120	PC.&Alum.	2700-6500K

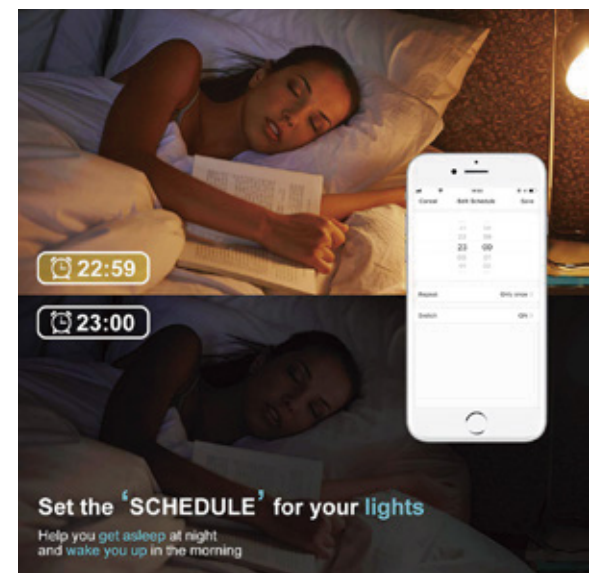



LED Cob Down Light

LED SMD Down Light



Recessed LED Cob Down Light

Recessed LED SMD Down Light

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Cut Size(mm)
Recessed	7W	110V/230V	700	>80/90	120°	Φ90*48	Φ70
	10W	110V/230V	1000	>80/90	120°	Φ130*48	Φ100
	15W	110V/230V	1500	>80/90	120°	Φ170*48	Φ140
	20W	110V/230V	2000	>80/90	120°	Φ190*50	Φ160
	30W	110V/230V	3000	>80/90	120°	Φ215*50	Φ195

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Cut Size(mm)
Recessed	7W	110V/230V	700	>80/90	120°	Φ90*27	Φ75
	10W	110V/230V	1000	>80/90	120°	Φ112*27	Φ100
	20W	110V/230V	2000	>80/90	120°	Φ216*27	Φ200
	30W	110V/230V	3000	>80/90	120°	Φ290*27	Φ260



Recessed LED Cob Ceiling Light

Surface Mounted LED SMD Down Light

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	Cut Size(mm)
Recessed	7W	110V/230V	700	>80/90	38°	Φ95*46	Φ70
	10W	110V/230V	1000	>80/90	38°	Φ117*51	Φ90

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)
Surface Mounted	7W	110V/230V	700	>80/90	120°	Φ145*27
	10W	110V/230V	1000	>80/90	120°	Φ145*27
	15W	110V/230V	1500	>80/90	120°	Φ170*27
	18W	110V/230V	1800	>80/90	120°	Φ215*27
	24W	110V/230V	2400	>80/90	120°	Φ215*27
	30W	110V/230V	3000	>80/90	120°	Φ285*27



LED Flood Light



LED Panel Light



LED Flood Light

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	IP Rated
LED flood	100W	110V/230V	10000	>80/90	120°	269*209*28	IP65
	150W	110V/230V	15000	>80/90	120°	334*228*31	IP65
	200W	110V/230V	20000	>80/90	120°	377*277*31	IP65
	300W	110V/230V	30000	>80/90	120°	433*318*31	IP65

LED Panel Light

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	CRI	Beam Angle	Size(mm)	IP Rated
LED Panel	40W	110V/230V	4000	>80/90	120°	595*595*33	IP20
	80W	110V/230V	8000	>80/90	120°	595*595*33	IP20
LED Strip Panel	40W	110V/230V	4000	>80/90	120°	595*595*20	IP20
	80W	110V/230V	8000	>80/90	120°	595*595*20	IP20



LED Sensor Bulbs

LED Sensor SMD Down Light

A-Series Sensor Bulb



Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	Detection Distance	Hold Time	Size(mm)	Base
A60	10W	110V/230V	1000	4-6m	20-30 seconds	Φ60*108	E26/E27/B22
	12W	110V/230V	1200			Φ60*118	E26/E27/B22
	15W	110V/230V	1500			Φ60*120	E26/E27/B22
A70	18W	110V/230V	1800	4-6m	20-30 seconds	Φ70*128	E26/E27/B22
A80	20W	110V/230V	2000			Φ80*145	E26/E27/B22



Global G80/G95/G120 Sensor Series

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	Detection Distance	Hold Time	Size(mm)	Base
G80	12W	110V/230V	1200	4-6m	20-30 seconds	Φ80*120	E26/E27/B22
G95	15W	110V/230V	1500			Φ95*136	E26/E27/B22
G120	18W	110V/230V	1800			Φ120*160	E26/E27/B22
	20W	110V/230V	2000			Φ120*160	E26/E27/B22



T80/T100/T120/T140 Sensor Series

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	Detection Distance	Hold Time	Size(mm)	Base
T80	20W	110V/230V	2000	4-6m	20-30 seconds	Φ80*138	E27/B22
T100	30W	110V/230V	3000			Φ100*165	E27/B22
T120	40W	110V/230V	4000			Φ120*194	E27/B22
T140	50W	110V/230V	5000			Φ140*218	E27/B22



Recessed LED Sensor SMD Down Light

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	Detection Distance	Hold Time	Size(mm)	Cut Size(mm)
Recessed	20W	110V/230V	2000	4-6m	20-30 seconds	Φ216*27	Φ200
	30W	110V/230V	3000			Φ290*27	Φ260



Surface Mounted LED Sensor SMD Down Light

Type No.	Wattage(W)	Voltage(V)	Lumen(lm)	Detection Distance	Hold Time	Size(mm)
Surface Mounted	15W	110V/230V	1500	4-6m	20-30 seconds	Φ170*27
	18W	110V/230V	1800			Φ215*27
	24W	110V/230V	2400			Φ215*27
	30W	110V/230V	3000			Φ285*27